

**Secure Connection Limited**  
Flat H, 11th Floor, Tower 6,  
Grand Water Front, 38 San Ma  
Tau Street, To Kwa Wan,  
KL, Hong Kong  
Customer Care Email:  
support@honeywellconnection.com  
Tel.: +852 5803 1828  
Web: www.honeywellconnection.com

The Honeywell Trademark is used under license  
from Honeywell International Inc. Honeywell  
International Inc. makes no representation or  
warranties with respect to these products. These  
products are manufactured by Secure Connection  
Limited, Hong Kong.

All trade names are registered trademarks of  
respective manufacturers listed. ©2024 Secure  
Connection Limited, Hong Kong. All rights reserved.

**Honeywell**

# Honeywell

## 6 OUTLET SURGE PROTECTOR WITH 2xTYPE C & 2xUSB

Owner's manual

Please read the manual carefully before use



---

**6 OUTLET SURGE PROTECTOR  
WITH 2xTYPE C & 2xUSB**  
Platinum Series

---

HC000047/SRG/1.8M/WHT/6/2U/PD25W/EU

HC000048/SRG/1.8M/WHT/6/2U/PD25W/TH

HC000049/SRG/1.8M/WHT/6/2U/PD25W/UK

HC000050/SRG/1.8M/WHT/6/2U/PD25W

HC000051/SRG/1.8M/WHT/6/2U/PD25W/VT

www.honeywellconnection.com  
info@honeywellconnection.com

Dear Customer,

Thank you for purchasing Honeywell 6 Outlet Surge Protector with 2xType C & 2xUSB.

To facilitate the installation and use of 6 Outlet Surge Protector with 2xType C & 2xUSB, we recommend that you carefully read this manual, and keep it stored safely. To ensure that you always enjoy quality performance, please use this manual for proper use and maintenance of your product.

If any questions arise during use, please consult this manual. If it is in accordance with the warranty, we kindly welcome you to contact us at:

**support@honeywellconnection.com**

We welcome any comments or suggestions you may have about our products and service.

# Contents

1. What's in the Box	01
2. Performance Index	01
3. Introduction	02
4. Features	02
5. Product Appearance and Structure	02
6. How to use the Surge Protector	04
7. Precautions for Use	04
8. Troubleshooting	05

## What's In The Box

1. 6 Outlet Surge Protector with 2xType C & 2xUSB: 1 Unit
2. User Manual: 1 Unit
3. Device Security Warranty Leaflet: 1 Unit
4. Warranty Card: 1 Unit
5. Thank You Card: 1 Unit

## Performance Index

Product Name	6 Outlet Surge Protector with 2xType C & 2xUSB
AC Outlets <sup>1</sup>	6 Outlet - Universal/EU/Thai/UK
Electrical Rating	Max 2425W 9.7A 250V~ 50/60Hz
Plug	10A, 250V~, 2 poles with earthing contact
Power Cord	India: 3Cx0.75mm <sup>2</sup> UK: H05VV-F 3G0.75mm <sup>2</sup> Eu: H05VV-F 3G0.75mm <sup>2</sup> Thai: H05VV-F 3G0.75mm <sup>2</sup> Vietnam: H05VV-F 3G0.75mm <sup>2</sup>
Automatic Reset Switch	RESET/OFF with circuit breaker
USB Ports & Power Output	2 X USB-A ports + 2 X USB-C ports Output: USB C1/C2: 5.0V~3.0A 9.0V~2.22A 12.0V~1.67A 20W Max USB C1+C2: 5.0V~3.0A 15W Max USB A1/A2: 5.0V~2.0A 10W Max USB C1/C2+A1/A2: 25W Max USB C1+C2+A1+A2: 25W Max
Surge Suppression	Surge Energy Joule Rating (Total): 1050 Joules
	Full 3-Line Surge Protection (L-N, L-PE, N-PE)
	Response time less than 1 nano second
	Max. Spike Current (Amps): 36,000 Amps
Safe Shutdown	Max. Spike Voltage (Kilovolts): 6 Kilovolts
	The Safe Shutdown feature allows the surge protector to continue functioning in the event of a catastrophic surge or when the unit has absorbed as much excess energy as it can. The surge protection function will no longer provide surge protection. This is visible to the consumer via the blue indicator light being no longer lit. AC outlets will continue providing power output continuously, but surge protection is no longer functioning. This allows the consumer to safely shutdown the surge protector and stop connecting any devices through the surge protector as the surge protection function is no longer available.
LED Indicator	Yes "PROTECTED" with blue LED indicator

1. Socket and plug may vary from country to country.

## Introduction


This product is a high-performance 6 Outlet Surge Protector with 2xType C & 2xUSB. It is equipped with six Universal/EU/Thai/UK sockets and 2xType C & 2xUSB Ports for charging. The compact and nifty design makes your life simpler and easier.

## Features

- Protect your equipment & devices from power surges & voltage spikes (6 Kilovolts Max) of up to 1050 Joules/36,000 Amps
- Rating: MAX 2425W 9.7A 250V~ 50/60Hz
- 6 Sockets with 2xUSB A Ports & 2xType C PD 20W Ports
- USB C1/C2 Output: 20W Max
- USB C1+C2 Output: 15W Max
- USB A1/A2 Output: 10W Max
- USB C1/C2+A1/A2 Output: 25W Max
- USB C1+C2+A1+A2 Output: 25W Max
- 7 Advanced safety features: Overload protection, Automatic reset switch, Child safety shutter, Fire resistant material, LED indicator for surge protection, MOV & DSW
- Automatic overload protection with Automatic reset switch allows instant resetting of surge protection in less than 1 nano second
- Metal oxide varistor (MOV) technology
- Pure copper provides 100% conductivity as per IACS (International Annealed Copper Standard)
- 1.8 Meter heavy duty power cord & plug
- White matt finish


## Product Appearance And Structure

### IN/VT

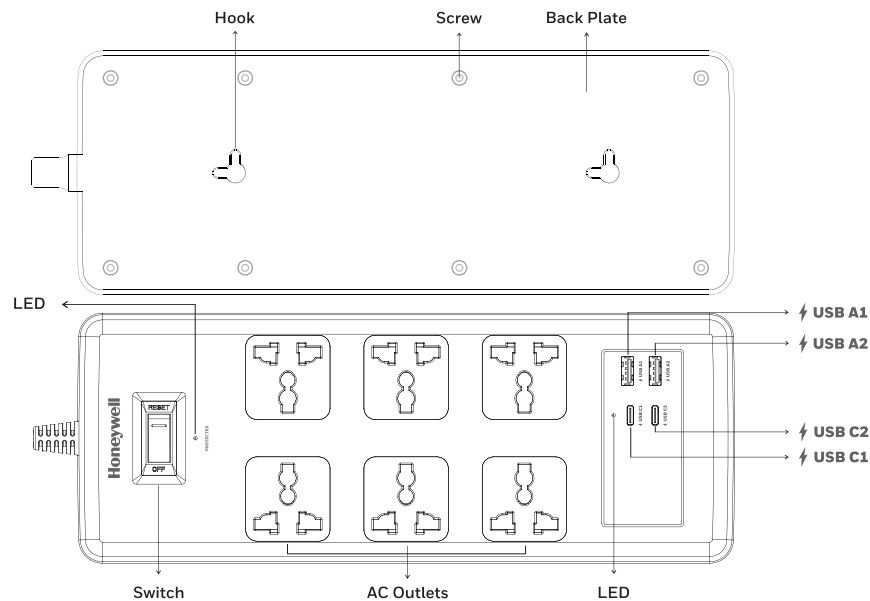


## Product Appearance and Structure (Continued)

### EU

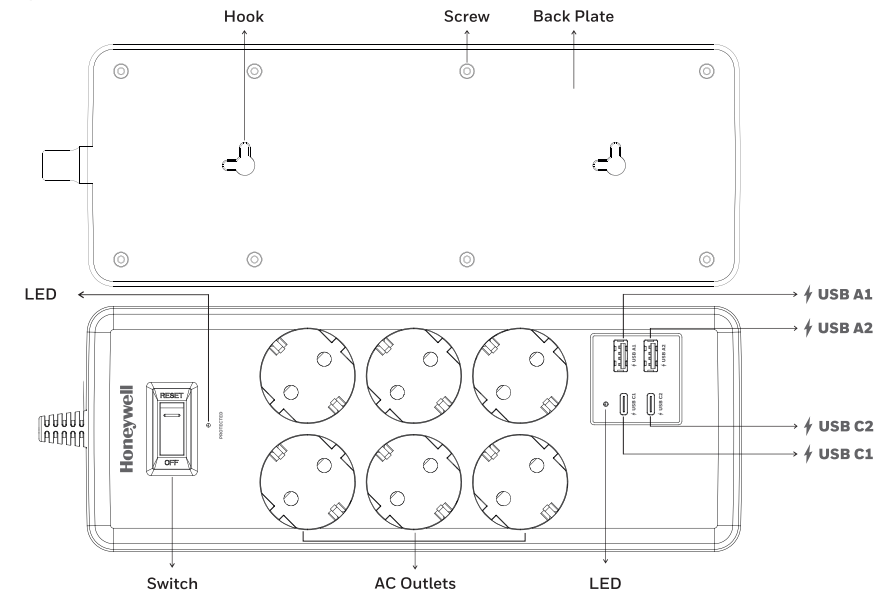


### UK

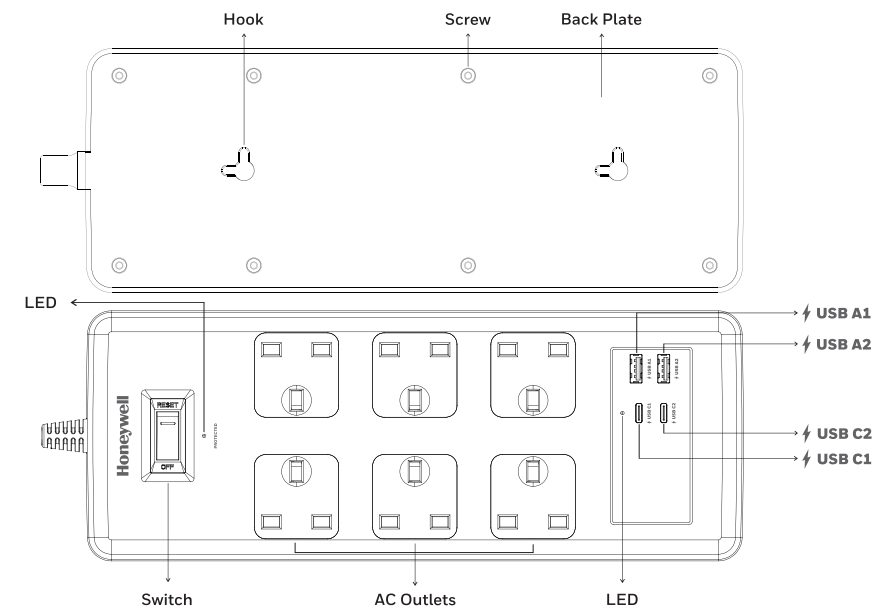

## Product Appearance and Structure (Continued)

TH

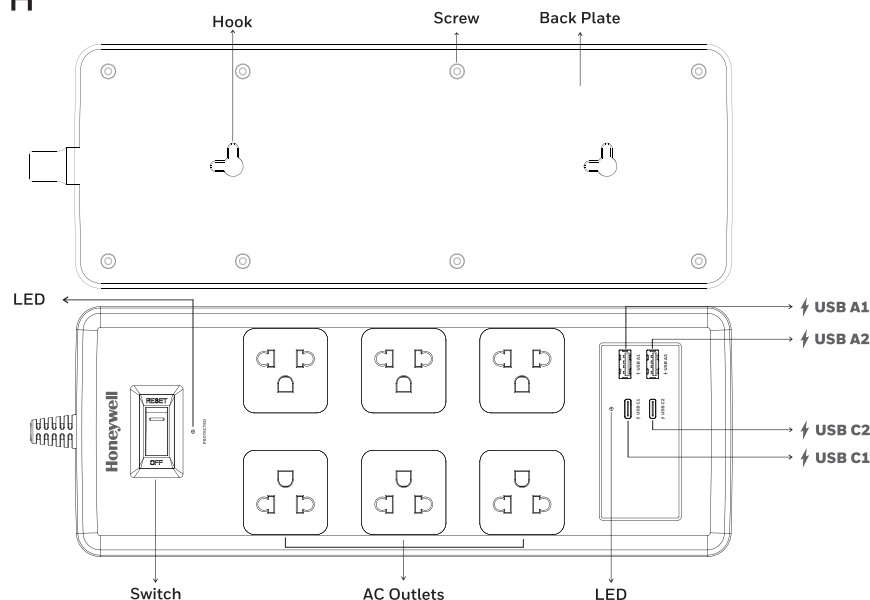

## How to use the Surge Protector

1. Plug the surge protector into a properly grounded AC wall socket and power on the surge protector.
2. Plug in/connect the equipment/device, turn your device/equipment On.

## Precautions For Use

- For optimum performance, please use the surge protector according to this user manual.
- Please plug the surge protector into an AC wall socket/outlet with a rated voltage of up to 250 Volts.
- Please do not plug in the surge protector into an AC wall socket that is not properly grounded. Using this product by plugging into a wall socket that is not properly grounded will void the warranty on this surge protector.
- Do not use the surge protector with any product which is not in conformity with rated specifications of this surge protector.
- It's normal for this surge protector to heat up a little during use.
- Do not place the surge protector close to any sources of heat such as fire, stove, candles etc.
- Please ensure that no form of liquid is spill on the surge protector. (Any such spill of any liquid on the surge protector voids the warranty on the product).
- Connect the equipment directly into your surge protector. Using any conjunction to connect the surge protector to the wall outlet will void all warranties.

## Troubleshooting

Problem	Corrective
If there is no AC power to any equipment, or the equipment doesn't turn on.	<ol style="list-style-type: none"> <li>1. Make sure the plug is plugged into a working AC outlet.</li> <li>2. Check all AC power connections.</li> <li>3. Make sure connected equipment are turned on.</li> </ol>
If the USB/C device is not charging.	<p>Unplug the USB cable and try the other charging port on the surge protector. (Note: some devices can only be charged using the original charging adapter that comes with the device. In this instance, follow the device manufacturer's instructions for properly charging the device.)</p> <p>The charging cable being used maybe faulty, please use another charging cable and try to charge your device.</p>
Protected LED is off	<p>The "protected" blue indicator light should be on when the power switch is turned on. If this light goes out at any time, it means that your surge protector has served its purpose and protected your equipment and needs to be replaced. Please contact customer care for further assistance.</p>