



Honeywell

UTP CAT6 SOLID CABLE 100/305 MTRS. FR-PVC

HONEYWELL Cat6 UTP Cable 4 Pairs is suitable for Horizontal Cabling Systems. Used to transmit High Speed Data, Voice and Video signals both digital & analog through entire CHANNEL. With 250 MHz operational bandwidth it well exceeds the requirement of ANSI/TIA 568-C.2 and ISO 11801.

Features

- 24 AWG Solid Bare Copper
- 100/305 Mtrs. Box
- Sheath Options : FR-PVC
- Sheath Jacket Colors on Demand.
- "CHANNEL" Performance Warranty
- Cable Well Exceeds The Requirements of ANSI/TIA 568-C.2 and ISO 11801

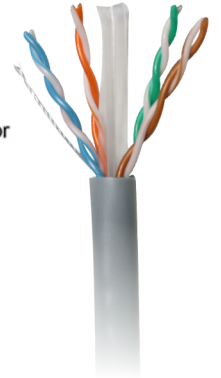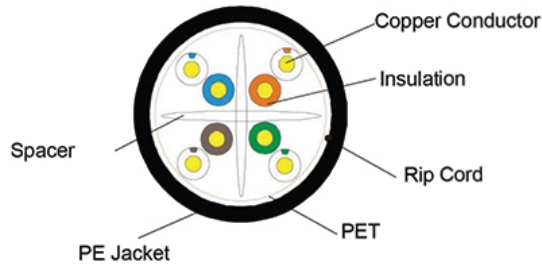

Technical Specifications

CONSTRUCTION	
Conductor	Solid Bare Electrolytic Grade Copper
Nominal Conductor Diameter (AWG)	24AWG
Insulation	Polyethylene (HDPE)
Insulation Dia.	0.93±0.03
Pairing	Twisted into Two core
No. of Pair	4, Each Twisted together
Color Code:	
Pair #1	Orange-White with Orange
Pair #2	Brown-White with Brown
Pair #3	Blue-White with Blue
Pair #4	Green-White with Blue
Outer Sheath Material	FR-PVC
Colour of Sheath	L-Grey
Approximate OD	5.5 ± 0.20 mm
RIP Cord	Yes
Sequential Marking	At Every Meter
Cross Filler	HDPE
Packing	100 Mtrs. in Tangle Free Box

PHYSICAL CHARACTERISTICS	
Installation Temperature	0 to +50°C
Storage Temperature	-20 to +60°C
Operating Temperature	-20 to +60°C

www.honeywellconnection.com

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell International Inc. makes no representation or warranties with respect to this product. This product is manufactured by Secure Connection Limited, Hong Kong.

All trade names are registered trademarks of respective manufacturers listed. ©2022 Secure Connection Ltd., Hong Kong. All rights reserved

ELECTRICAL PARAMETERS

Conductor Resistance (DC)	9.8Ω/1000 Mtr. @20°C Max.
Resistance Unbalance	5% Max.
Mutual Capacitance	5.6 nf/100 Mtr. Max.
NVP	69%
Impedance	100 ± 15%Ω
Worst Cable Skew	45ns/100 Mtr.

HIGH FREQUENCY ELECTRICAL PARAMETERS

FREQ (MHz)	ATT (db/100m) Min.	Next (db) Min.	PS. NEXT (dB) Min.	ACRF (db@100m) Min.	PS.ACRF (db@100m) Min.	Return Loss (db/100m) Min.
1	2.1	65.0	62.0	63.3	60.3	19
4	4.0	63.0	60.5	51.2	48.2	19
8	5.7	58.2	55.6	45.2	42.2	19
10	6.3	56.6	54.0	43.3	40.3	19
16	8.0	53.2	50.6	39.2	36.2	18
20	9.0	51.6	49.0	37.2	34.2	17.5
25	10.1	50.0	47.3	35.3	32.3	17
31.25	11.4	48.4	45.7	33.4	30.4	16.5
62.5	16.5	43.4	40.6	27.3	24.3	14.0
100	21.3	39.9	37.1	23.3	20.3	12.0
200	31.5	34.8	31.9	17.2	14.2	9.0
250	35.9	33.1	30.2	15.3	12.3	8.0



COPPER



CAT6



UTP



Ordering Information (Part Codes and Description)

No.	Part Code	Description
1	HC000201/CPR/C6/UTP/FR/100M	Cat 6 UTP 4 Pair Solid Cable FR-PVC CM 100 Mtrs.
2	HC000207/CPR/C6/UTP/FR/24/305M	Cat 6 UTP 4 Pair Solid Cable FR-PVC CM 305 Mtrs

History
Rev. 1.1, Jan 2022

www.honeywellconnection.com

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell International Inc. makes no representation or warranties with respect to this product. This product is manufactured by Secure Connection Limited, Hong Kong.

All trade names are registered trademarks of respective manufacturers listed. ©2022 Secure Connection Ltd., Hong Kong. All rights reserved